


With hydraulic cylinder and steel cable synchronization, the TLT440W Wheel Alignment four-post lift tool guarantees a stable and smooth lifting and lowering. Two-layer concealed plate structure provides excellent synchronizing performance with the horizontal precision of 1mm.

## FEATURES

- Front wheel turn plate's position is adjustable and rear wheel sliding plate is extended for various vehicle type.
- Deployed with rolling jack with small scissor hydraulic lifting and lowering, can be moved back and forth and easy to adjustment tire.
- Positioning levels accuracy is adjustable, distance between platforms is adjustable, wheel base in certain scope is adjustable.
- Driven by hydraulic cylinder, full-scope mechanical safety locking by locking latch, manual lowering.
- Cable rupture safety system, effectively protects vehicle from overturn.
- Four connected steel cables force synchronized movement of the lift, effectively prevent vehicles from sloping.
- Cylinder travel limit device effectively protects cylinder and extends its lifespan.
- Electric controlled lifting and lowering type safe and easy operation.
- Installation position of turntable and side slip plate can be moved backwards and forwards.
- Applicable for vehicles with different wheel base.
- CE certificated.

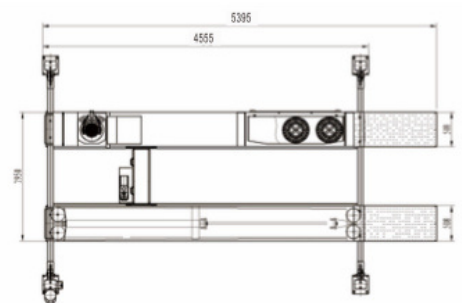

## SPECIFICATION

<b>RATED LOAD</b>	4000kg
<b>LIFTING HEIGHT</b>	1850mm
<b>INITIAL HEIGHT</b>	220mm
<b>LIFTING TIME</b>	≤60S
<b>LOWERING TIME</b>	≥20S ≤40S
<b>MAX DRIVE-ON WIDTH</b>	3045mm
<b>PLATFORM LENGTH</b>	4240mm
<b>PLATFORM WIDTH</b>	500mm

<b>OVERALL WIDTH</b>	3445mm
<b>OVERALL HEIGHT</b>	2172mm
<b>MOTOR POWER</b>	2.2KW
<b>MOTOR VOLTAGE</b>	3 phase/380V or Single phase/220V
<b>WORKING NOISE</b>	≤75dB(A)
<b>WORKING OIL PRESSURE</b>	20MPa

SECONDARY LIFT	
<b>PLATFORM LENGTH</b>	915~1450mm
<b>PLATFORM WIDTH</b>	215mm
<b>LIFTING TIME</b>	45S
<b>RATED LOAD</b>	2000kg
<b>LIFTING HEIGHT</b>	450mm
<b>WORKING NOISE</b>	≤70dB(A)
<b>WORKING OIL PRESSURE</b>	16MPa
<b>WORKING AIR PRESSURE</b>	0.5~0.7MPa

## CONFIGURATION

		BASIC	CE STANDARD
<b>DRIVE ON RAMP ASSEMBLY</b>	508X1060mm	●	●
<b>UNLOCKING SYSTEM</b>	Manual lowering device	●	●
<b>POWER UNIT</b>	Domestic 2.2KW 12L	●	●
<b>SECONDARY LIFT</b>	2 ton	●	●
<b>TURNTABLE</b>		●	●
<b>SIDE SLIP PLATE</b>		●	●
<b>SAFETY DEVICE</b>	Control box, cylimit limit device, Emergency lowering device, CE-STOP, loose rope forced balance system		●
<b>COLOR</b>	Launch red, Launch grey, Volkswagen blue, Hyundai blue, GM blue(Buick blue)	●	●
<b>WARRANTY</b>	1 year	●	●